



EFL803-HV/1003-HV

High Capacity Electric Counterbalanced
Forklift 8-10T



Innovation Through Simplicity


EP EQUIPMENT CO.,LTD

V2505.02

www.ep-equipment.com

Email: info@ep-equipment.com

EP Industrial Park, Xiaquan Village, Lingfeng Street, Anji County, Huzhou City,
Zhejiang Province

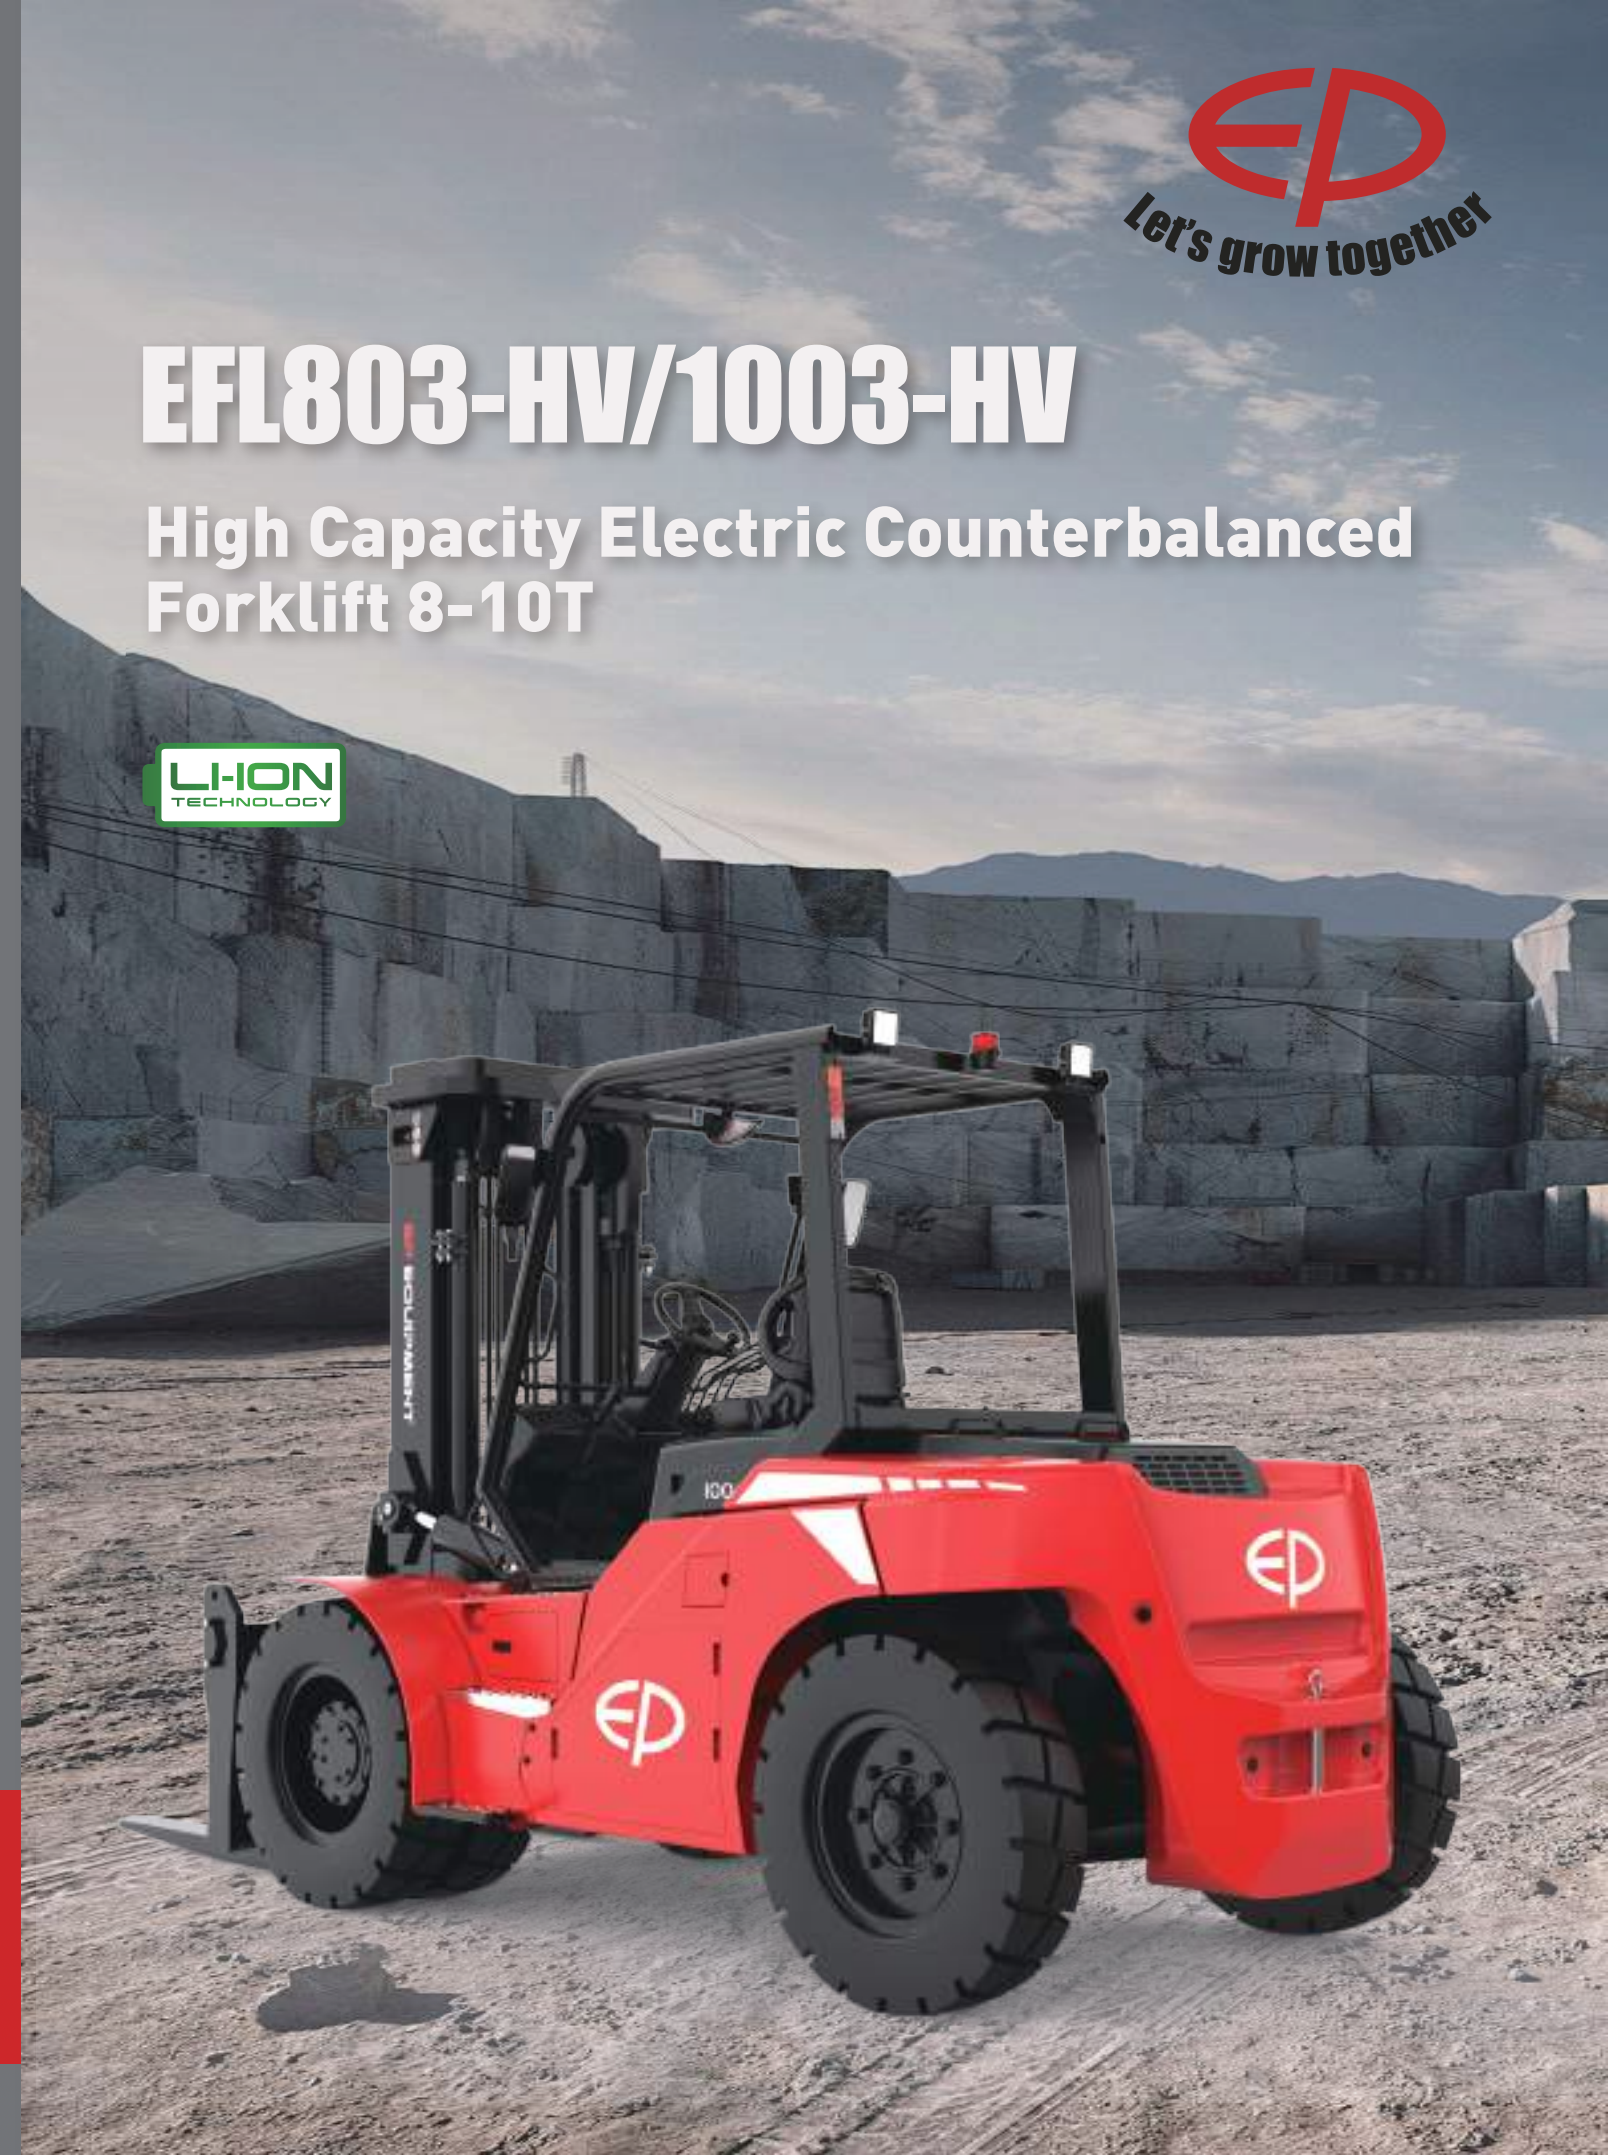

WHY HIGH VOLTAGE?

Introducing high-voltage electric forklifts with a complete lineup from 4 to 25-ton load capacities, marking the era of high-voltage high-capacity Li-ion trucks.

This groundbreaking development adopts world-leading high-voltage Lithium-ion power combined with advanced PMSM (Permanent Magnet Synchronous Motor) technology. These high-capacity forklifts ensure triple guarantees of high performance, long running time and safety while aligning with the current trend of green and sustainable development.



HIGH PERFORMANCE: HIGH SPEED AND HIGH GRADEABILITY

High-voltage Li-ion batteries enable more power delivery to motors, improving acceleration and travel speeds for high-capacity trucks. PMSMs complement this with rapid response times, swiftly reaching required speeds and torques. This combination of PMSM and high voltage can provide stable and strong power output, which further gives high-capacity trucks excellent climbing capabilities ensuring that the forklift can cope with various applications with ease.

The high-voltage model offers a 1.5-2 times performance improvement over the low-voltage model. Taking the 10-ton model as an example:

100%

Improvement in travel speed for high voltage models in laden and unladen conditions.

45%

Faster lifting speed demonstrated by the high-voltage models.

45%

Improvement in gradeability when laden for high voltage models.

100%

Improvement in gradeability when unladen.



ENERGY EFFICIENCY: EXTENDED RUNTIME AND FAST CHARGING

High-voltage Li-ion batteries have high energy density and can store more electrical energy within a compact volume. High-voltage systems consume less energy and provide longer battery running time comparing low-voltage systems. Notably, these high-voltage Li-ion batteries boast an impressive cycle life of up to 4000 cycles, ensuring long-term durability and minimizing the need for battery replacements.

The PMSMs incorporate advanced control technology to optimize motor efficiency. Unlike traditional AC motors, PMSMs have higher energy conversion efficiency and reduce energy waste. This means that high-capacity trucks can work continuously for prolonged hours at lower costs.



4000

cycles for high-voltage Li-ion batteries

Equipped with fast charging capabilities, high-capacity trucks offer a remarkable charging experience. The high-voltage models are compatible with vehicle-grade charging stations and support 1C charging rating, allowing them to be fully charged in as fast as 1-1.2 hours. This minimizes downtime and maximizes productivity, making it ideal for multi-shift operations

Lithium batteries present considerably lower charging costs than fuel expenses. The integration of high-voltage and PMSM technology achieves up to 15% greater electricity savings versus traditional lithium and AC technology configurations. This significantly reduces long-term energy consumption costs.



1C
Charging



1 hour
Fully charged



15%
Energy savings


Smart and reliable strategy for thermal management

The high-capacity trucks utilize three distinct cooling systems to ensure optimal performance and reliability. Specifically, two water cooling systems are employed for the motor and the battery, while an oil cooling system is dedicated to the hydraulics system.

The water cooling systems provide superior cooling performance, preventing the truck from overheating even under the most demanding conditions or in the heat of summer. Water's higher heat transfer capacity compared to air allows it to dissipate heat more efficiently from critical components like the motor and battery. This efficient heat dissipation helps maintain the battery temperature around 30~35°C, protecting these vital components from overheating and potential damage or failure. Consequently, this enhances the overall reliability and longevity of the high-capacity trucks.

Additionally, water cooling systems typically operate with less noise compared to air cooling systems that rely on high-speed fans. This noise reduction is particularly beneficial in applications where a quieter operation is desirable, such as in urban areas or indoor facilities.

The oil cooling system, on the other hand, is used for the hydraulics system. This system ensures that the hydraulic components remain within optimal temperature ranges, thereby maintaining their efficiency and preventing overheating. By effectively managing the temperature of the hydraulics system, the oil cooling system contributes to the smooth and reliable operation of the truck's hydraulic functions.

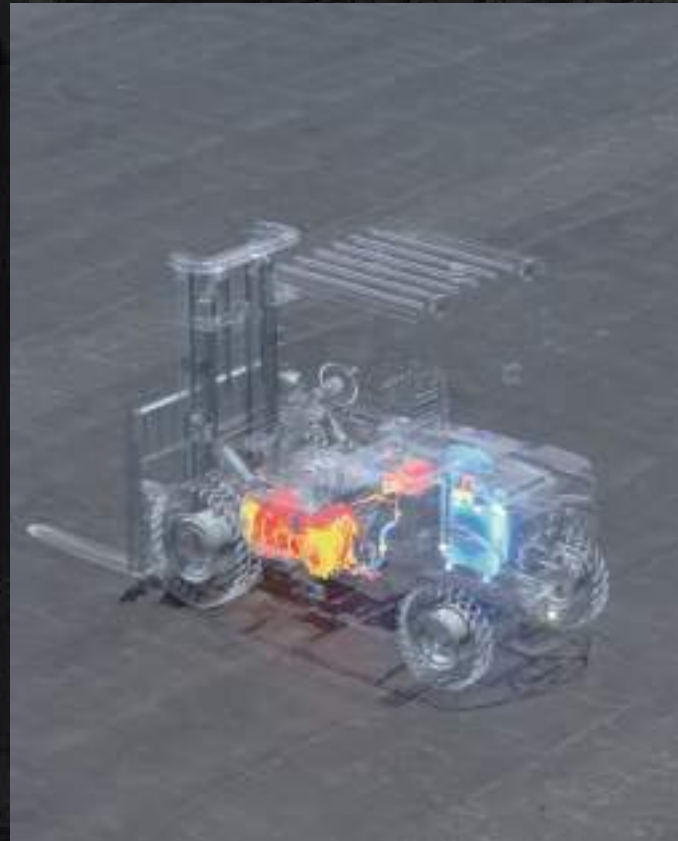

Safety Assured: Battery, motor protection, monitoring and mast buffering

Both high-voltage lithium batteries and PMSM employ multiple protective measures to ensure safe operations including overcharge protection, over-temperature monitoring, short-circuit protection, etc. minimizing the risk of potential hazards and maximizing operational safety.

The central controlling module- VCU (Vehicle Control Unit) extends the safety of the high-voltage forklifts. VCU provides precise control and real-time monitoring of critical parameters to ensure the truck operates within safe limits.

It also features turn speed control, which adjusts the forklift's speed based on the turning angle, ensuring stability during turns. An over-speed alarm alerts the operator if the forklift exceeds the safe speed limit.*

The high-capacity forklift mast is equipped with a hydraulic buffering system that ensures smooth lifting and lowering of loads. With controlled deceleration, the fork movement is smooth with no abrupt stops that could damage the load or cause operator discomfort. This feature enhances operational safety and prolongs the lifespan of the mast components.



Low maintenance: Longer battery life span

Operating at a higher voltage allows the battery to be designed with fewer individual cells. With fewer components and a simpler design, the risk of battery failure is lowered.

Thanks to advanced BMS (Battery Management System) which helps to regulate and monitor high-voltage battery, these batteries tend to have a longer life than low-voltage lithium batteries, reducing the need of battery replacement.

The brushless, simple rotor design of PMSM eliminates mechanical wear from brushes and commutators. This durable, low-friction construction requires minimal periodic maintenance, reducing associated labor costs and downtime.



Sustainability : Zero emissions for cleaner environment

As fully electric trucks powered by lithium-ion batteries, these forklifts produce zero emissions during operation, eliminating exposure to toxic fumes like carbon monoxide and nitrogen oxides.

Unlike lead-acid batteries which can leak corrosive acid, lithium-ion batteries do not risk hazardous spills. The high-capacity li-ion trucks contribute to a cleaner and safer indoor working environment without compromising handling capabilities.



Strong adaptability adaptable to harsh outdoor weather conditions

Experience uninterrupted productivity through rain, puddles, and damp conditions with the overall IPX4 rating. Plus an exceptional IP67 rating for high-voltage components. Engineered to withstand harsh temperature, high-capacity trucks offer an ambient temperature range of -20°C~40°C allowing them to perform no matter climate.

Battery heating when charging comes as a standard function for high capacity models, which is activated when the surrounding temperature is below zero to always offer an optimal temperature range for efficient and safe charging even in cold weather conditions.

The dual front wheels is a standard configuration on several models offering a wider base of support, which greatly improves the forklift's stability. Considering the capacity loads of the high-capacity trucks, the weight of the load is more evenly distributed across a larger surface area. The increased ground contact area provided by the dual wheels enhances traction. This is particularly beneficial in environments where the floor may be slippery or uneven while operating outdoors, ensuring that the forklift can maintain a firm grip and operate safely. This not only helps in maintaining balance but also minimizes the stress on individual tires, extending the lifespan of the tires.



Great support for clients' investment: After-sales Service



Remote/Online Services:

Telematics technology enables remote monitoring of battery conditions, performance status, and other critical parameters for forklifts. Additionally, production, technical, and after-sales experts are available around the clock to provide prompt and comprehensive solutions for any maintenance issues through virtual support.



Physical Services:

Comprehensive manuals and supporting documents are provided for all forklift models. In case of breakdowns or replacements, spare parts are swiftly delivered to the clients' locations by global subsidiaries or domestic inventory, minimizing operational disruptions caused by equipment downtime.

DIVERSE LOADS, WE GOT YOU.

EFL803,1003-HV are engineered for the most demanding heavy-duty applications in industries like mining, quarry and stone industry, heavy equipment manufacturing, etc. The dual front wheels offer superior load distribution and stability when handling extraordinarily heavy loads. Despite their compact size and small turning radius, these forklifts boast a high ground clearance, allowing them to navigate challenging terrains with ease. The max travel speed of 30km/h allows the trucks to move swiftly, handling operations efficiently over long distances. Designed with low noise levels, these trucks can provide comfortable working environments for operators, minimizing impacts in noise-sensitive working environments. Additionally, the optional attachment like fork positioner with sideshift enables these forklifts to carry different shapes of loads, enhancing their versatility in handling diverse cargo.



Everything you want in one truck

Mast




Lifting and lowering Buffer
Max Lifting height up to 7000mm*


Attachments



Fork positioner with pin type forks
This versatile combination allows handling different load sizes/positions

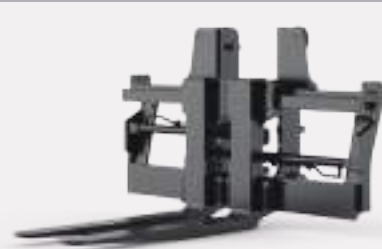

Fork positioner with side shift: Forks with terminal west*
The shaped fork tips facilitate pallet/load entry

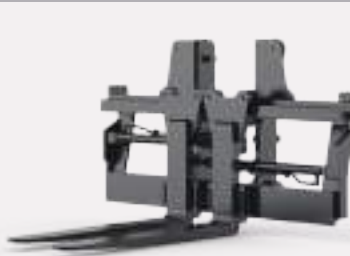

Fork positioner with side shift: Roller guided forks*
Allowing easier pallet/load entry

Operating Compartment



Cabin with AC and heater*



Fingertips*



AC and heater*



LED Display



Reversing camera*



Battery



309V304Ah LFP battery
Battery heating when charging

Lights



Front working lights



Strobe warning light





Area warning light*

The configurations marked with an asterisk (*) are optional.




High Capacity Electric Counterbalanced Forklift 8-10T

EFL803-HV/1003-HV

				Distinguishing mark		
				Service weight		
				Tyres/chassis		
				Dimensions		
				Performance data		
				Electric-engine		
				Addition data		

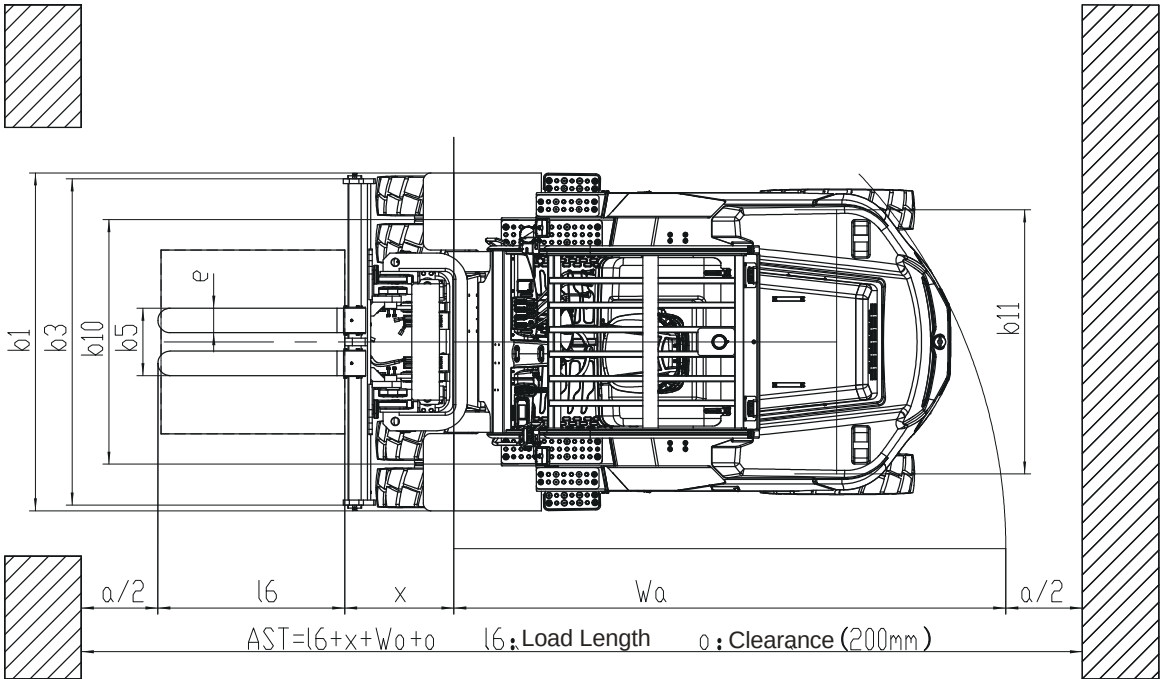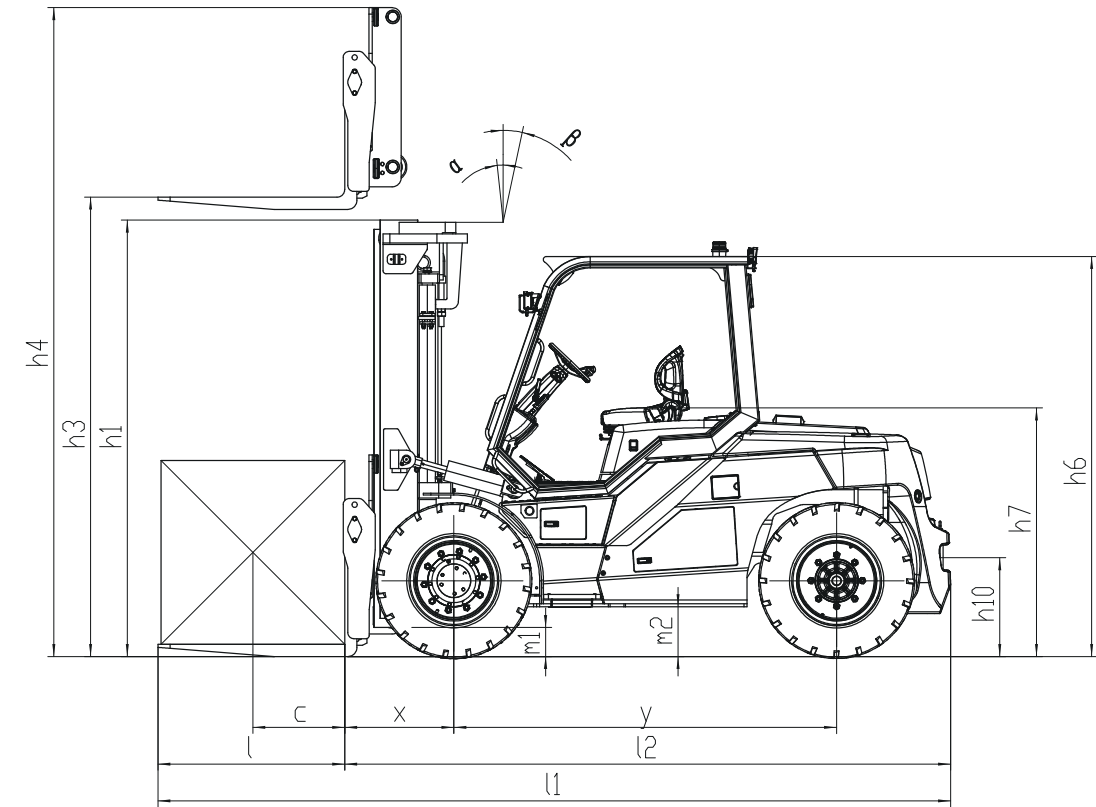

If there are improvements of technical parameters or configurations, no further notice will be given.
The diagram shown may contain non-standard configurations.

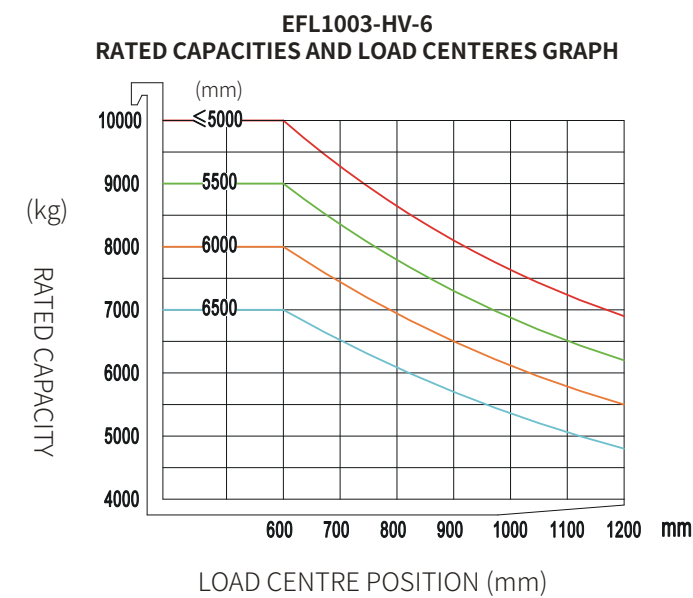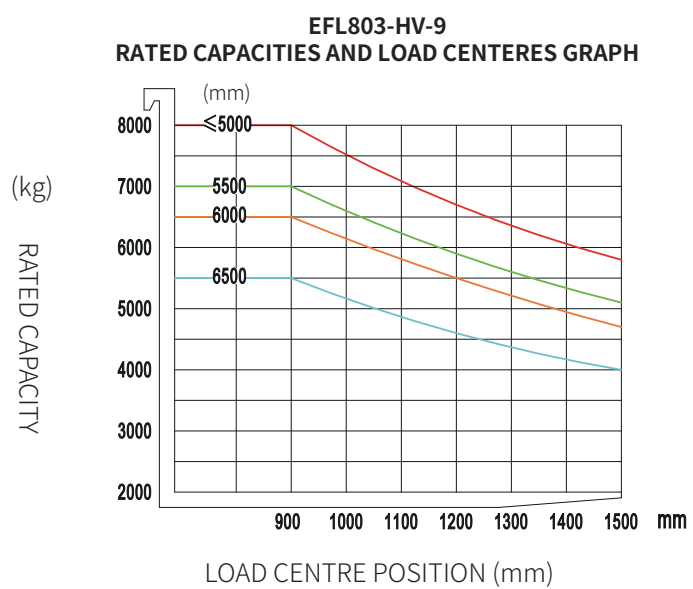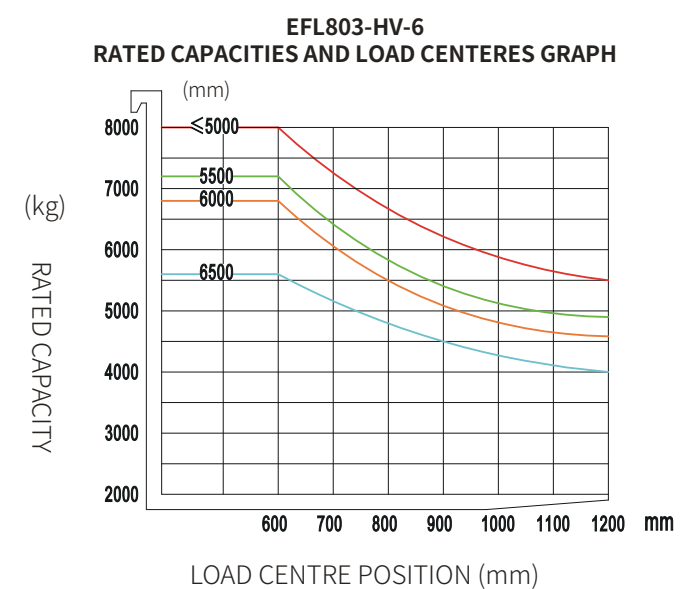

Mast Option

EFL803-HV-6

Mast types	Lift height (h3)	Height, Mast		Height,Free lift(h2)	
		Height, mast lowered(h1)	Height, mast extended(h4)		No backrest
			No backrest	With backrest	
	mm	mm	mm	mm	mm
2-Standard Mast	3000	2850	4310	—	195
	3300	3000	4610	—	195
	3500	3100	4810	—	195
	4000	3350	5310	—	195
	4500	3650	5810	—	195
	5000	3900	6310	—	195
	5500	4200	6810	—	195
	6000	4450	7310	—	195
	6500	4750	7810	—	195
2-Free Mast	3000	2850	4310	—	1300
	3500	3100	4810	—	1550
	4000	3350	5310	—	1800
3-Free Mast	4500	2950	5950	—	1535
	4800	3050	6250	—	1635
	5000	3116	6451	—	1702
	5500	3283	6949	—	1868
	6000	3450	7450	—	2035
	6500	3616	7951	—	2202
	7000	3783	8449	—	2368

EFL803-HV-9

Mast types	Lift height (h3)	Height, Mast		Height,Free lift(h2)	
		Height, mast lowered(h1)	Height, mast extended(h4)		No backrest
			No backrest	With backrest	
	mm	mm	mm	mm	mm
2-Standard Mast	3000	2850	4310	—	205
	3300	3000	4610	—	205
	3500	3100	4810	—	205
	4000	3350	5310	—	205
	4500	3650	5810	—	205
	5000	3900	6310	—	205
	5500	4200	6810	—	205
	6000	4450	7310	—	205
	6500	4750	7810	—	205
2-Free Mast	3000	2850	4310	—	1310
	3500	3100	4810	—	1560
	4000	3350	5310	—	1810
3-Free Mast	4500	2950	5950	—	1545
	4800	3050	6250	—	1645
	5000	3116	6451	—	1712
	5500	3283	6949	—	1878
	6000	3450	7450	—	2045
	6500	3616	7951	—	2212
	7000	3783	8449	—	2378

EFL1003-HV-6

Mast types	Lift height (h3)	Height, Mast			Height,Free lift(h2)	
		Height, mast lowered(h1)	Height, mast extended(h4)		No backrest	With backrest
			No backrest	With backrest		
	mm	mm	mm	mm	mm	mm
2-Standard Mast	3000	2850	4310	—	200	—
	3300	3000	4610		200	
	3500	3100	4810	—	200	—
	4000	3350	5310	—	200	—
	4500	3650	5810	—	200	—
	5000	3900	6310	—	200	—
	5500	4200	6810	—	200	—
	6000	4450	7310	—	200	—
	6500	4750	7810	—	200	—
2-Free Mast	3000	2850	4310	—	1305	—
	3500	3100	4810	—	1555	—
	4000	3350	5310	—	1805	—
3-Free Mast	4500	2950	5950	—	1540	—
	4800	3050	6250	—	1640	—
	5000	3116	6451	—	1707	—
	5500	3283	6949	—	1873	—
	6000	3450	7450	—	2040	—
	6500	3616	7951	—	2207	—
	7000	3783	8449	—	2373	—

Standard Configuration

- Fork positioner with pin type forks
 - Fork length 1520mm (600mm LC) / 1820mm (900mm LC)
 - 2130mm fork carriage width
 - 309V304Ah LFP battery
 - Heating system for lithium battery charging
 - Telematics
 - Mechanical lever
 - Buzzer
- Pneumatic tyres
 - Standard overhead guard
 - Mast lifting and lowering buffer
 - Lighting package: LED front working light, turn signal light, market light, LED rear working light, strobe warning light
 - Upgraded suspension seat with armrest + headrest + safety belt switch
 - Rear grab handle with horn
 - OPS system

Options

- Customized fork length/non-standard accessories
 - Customized fork carriage width
 - Customized fork backrest
 - Attachments:
 - Fork positioner with sideshift: Forks with terminal west
 - Fork positioner with sideshift: Roller-guided forks
 - 309V228Ah LFP battery
 - Chargers
 - 20kw (3 phase AC 370V-460V, 50-60HZ, 32A plug)
 - 40kw (3 phase AC 370V-460V, 50-60HZ, 63A plug)
 - Fingertips
 - Solid tyres / non-marking tyres
 - Reversing radar/reversing camera/reversing radar and camera
- Lights
 - LED working lights on mast
 - Rotating warning light / rotating buzzer warning light
 - Rear/front and rear blue lamp
 - Front fog light
 - Customized area warning lamp
 - Cigarette lighter socket 12V5A
 - USB interface 24V
 - Turn speed control
 - Adjustable overspeed alarm
 - Cabin options:
 - Basic half-cabin: front windshield, front wiper (including sprinkler), roof
 - Upgrade half-cabin:basic half-cabin, rear windshield, rear wiper
 - Basic full cabin:upgrade half-cabin, left and right doors, defogging function
 - Upgrade full cabin: basic full cabin, air conditioner
 - Grammer MSG65-531 (suspension seat with armrest + safety belt switch)